



MANNHART SALAD DRYER



MODEL SD-PE

**“MAKES EVERY
SALAD**

A WINNER!”

**DRIES ONE CASE OF LETTUCE
WITHIN MINUTES**

FRESH, CRISP APPEARANCE OF SALAD

EXTENDED SHELF LIFE

SAVE 15% OR MORE ON SALAD DRESSING

- **ALL POLYETHYLENE, HEAVY-DUTY CONSTRUCTION, STAINLESS STEEL REINFORCED**
- **EASY TO REACH TIMER LOCATED AT TOP OF TUB WITH POWER CORD STORAGE**
- **STAINLESS STEEL MOTOR SPLASHGUARD PROTECTS FULLY SEALED MOTOR**
- **EASY TO LOAD POLYETHYLENE SPIN BASKET WITH HAND GRIPS**
- **WATER DRAINS THROUGH PVC EXTENSION TUBE DIRECTLY INTO FLOOR DRAIN OR CONTAINER UP TO 9” HIGH - NO SPLASHING**
- **EASY TO LOCK, HEAVY-DUTY CASTERS WITH BRAKES**
- **EASY TO CLEAN - NO HARD TO REACH AREAS**
- **ONE YEAR WARRANTY, PARTS & LABOR**



BUILT FROM THE GROUND UP!

MADE IN USA



MANNHART, INC.
651 Industrial Boulevard
Grapevine, Texas 76051
Tel (817) 421-0100
Fax (817) 421-0246
www.mannhart.com



MANNHART, INC.

651 Industrial Boulevard, Grapevine, Texas 76051


Phone (817) 421-0100

FAX (817) 421-0246

www.mannhart.com

MANNHART SALAD DRYER

Model SD-PE

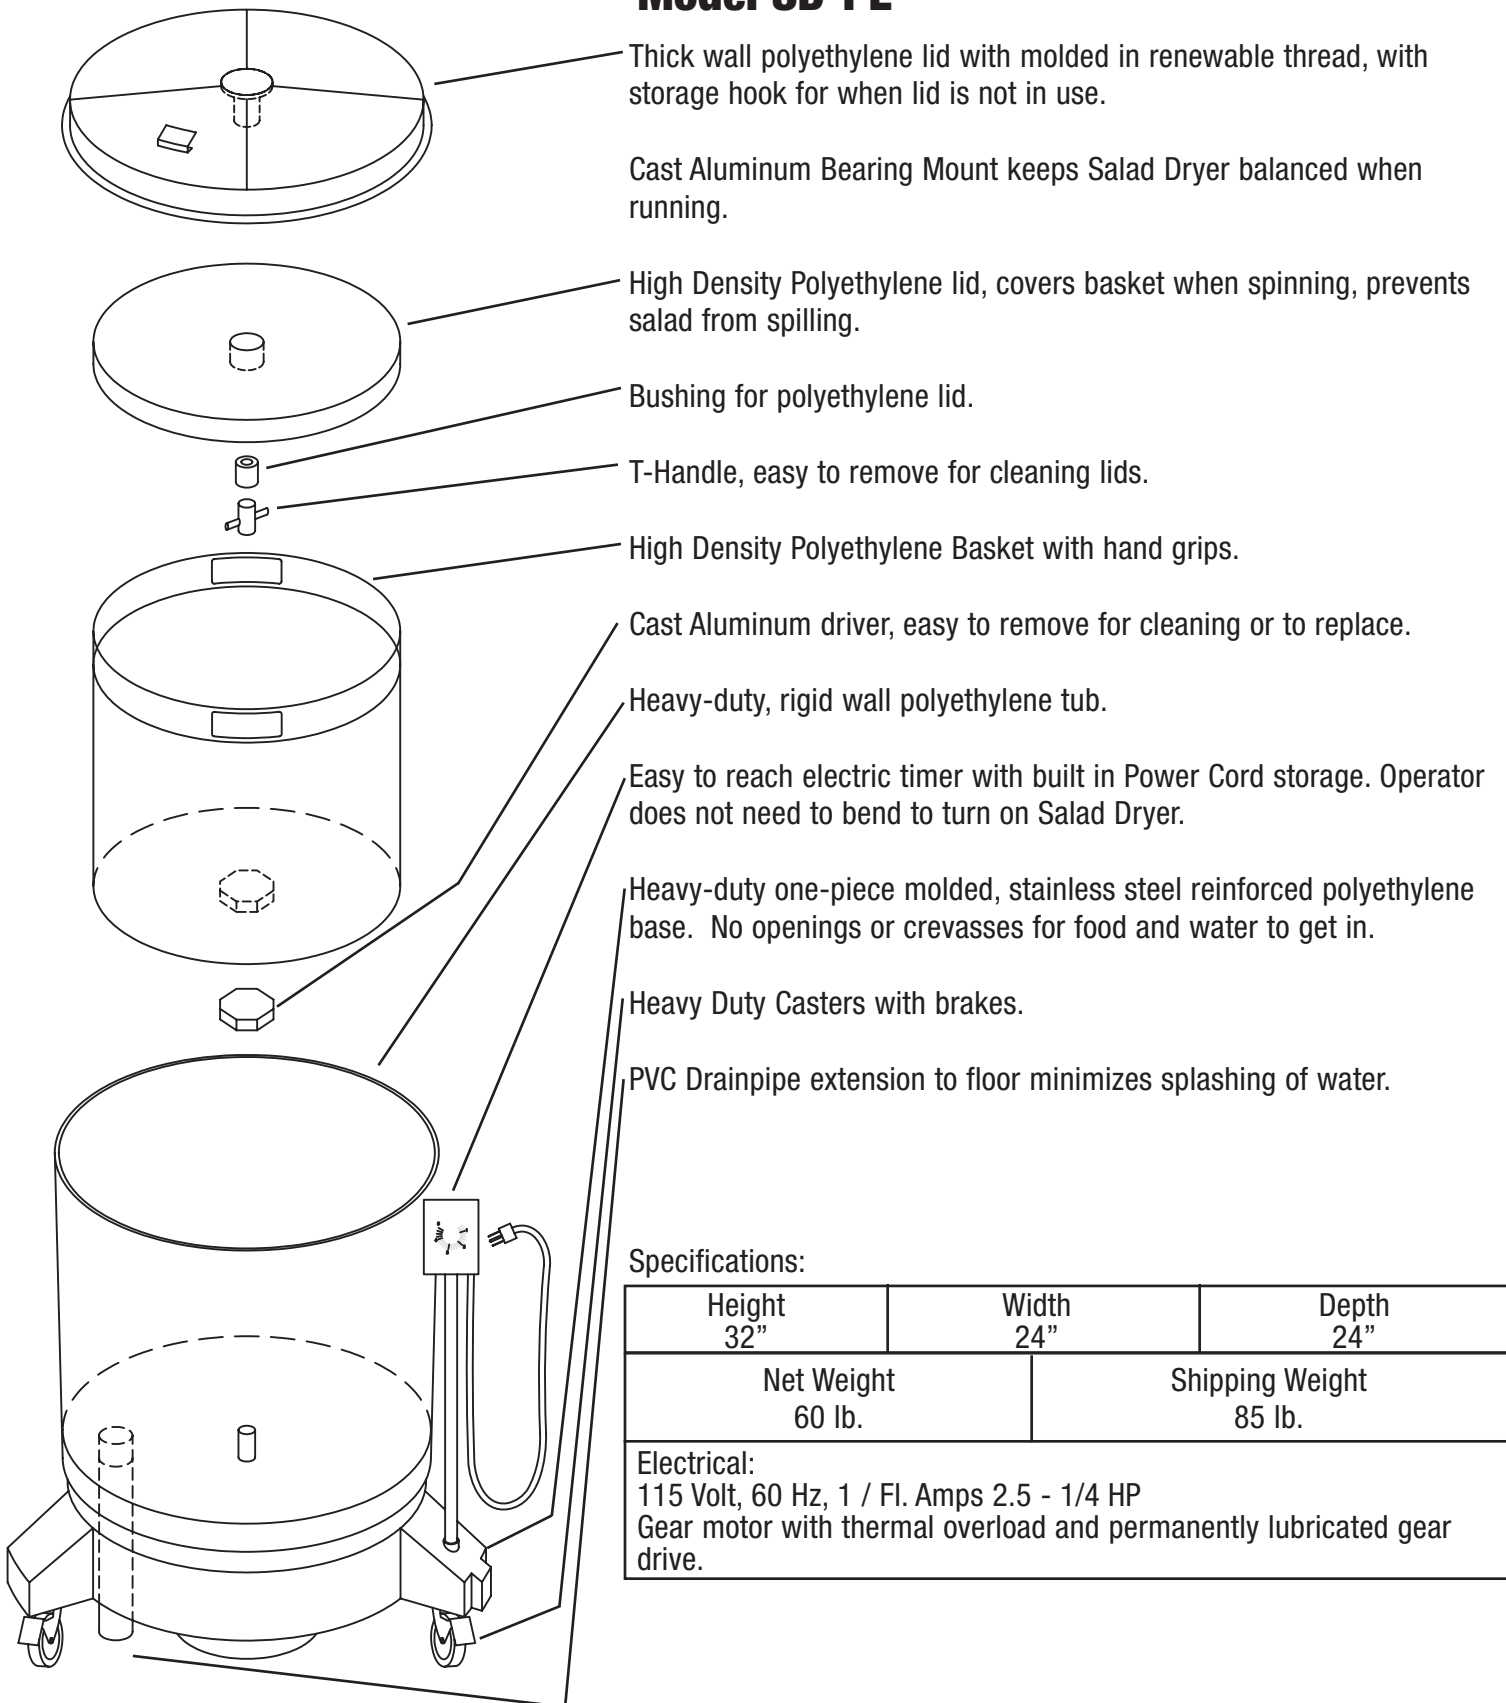

Thick wall polyethylene lid with molded in renewable thread, with storage hook for when lid is not in use.

Cast Aluminum Bearing Mount keeps Salad Dryer balanced when running.

High Density Polyethylene lid, covers basket when spinning, prevents salad from spilling.

Bushing for polyethylene lid.

T-Handle, easy to remove for cleaning lids.

High Density Polyethylene Basket with hand grips.

Cast Aluminum driver, easy to remove for cleaning or to replace.

Heavy-duty, rigid wall polyethylene tub.

Easy to reach electric timer with built in Power Cord storage. Operator does not need to bend to turn on Salad Dryer.

Heavy-duty one-piece molded, stainless steel reinforced polyethylene base. No openings or crevasses for food and water to get in.

Heavy Duty Casters with brakes.

PVC Drainpipe extension to floor minimizes splashing of water.

Specifications:

Height 32"	Width 24"	Depth 24"
Net Weight 60 lb.		Shipping Weight 85 lb.

Electrical:
115 Volt, 60 Hz, 1 / Fl. Amps 2.5 - 1/4 HP
Gear motor with thermal overload and permanently lubricated gear drive.